




		LWZ-W 600 Trend
		207969
Hersteller		STIEBEL ELTRON
Specific energy consumption in colder climates with control subject to on-site requirements	kWh/(m²a)	-81,98
Specific energy consumption in moderate climates with control subject to on-site requirements	kWh/(m²a)	-42,94
Specific energy consumption in warmer climates with control subject to on-site requirements	kWh/(m²a)	-17,95
Energy efficiency class in colder climates with control subject to on-site requirements		A+
Energy efficiency class in moderate climates with control subject to on- site requirements		Α+
Energy efficiency class in warmer climates with control subject to on-site requirements		E
Ventilation unit type		WLA, Zwei Richtungen
Drive type		Drehzahlgeregelt
Heat recovery type		Rekuperativ
Rate of temperature change for heat recovery	%	87,5
Max. air flow rate	m³/h	600
Max. power consumption	W	252
Sound power level LWA	dB(A)	54
Reference air flow rate	m³/s	0,117
Reference pressure differential	Pa	50
Specific power input	W/(m³/h)	0,23
Control factor, control subject to on-site requirements		0,65
Internal air leakage quota	%	0,78
External air leakage quota	%	0,59
Annual power consumption in colder climates with control subject to on- site requirements	kWh/a	704
Annual power consumption in moderate climates with control subject to on-site requirements	kWh/a	167
Annual power consumption in warmer climates with control subject to on-site requirements	kWh/a	122
Annual heating savings in colder climates with control subject to on-site requirements	kWh/a	9084
Annual heating savings in moderate climates with control subject to on- site requirements	kWh/a	4644
Annual heating savings in warmer climates with control subject to on- site requirements	kWh/a	2100

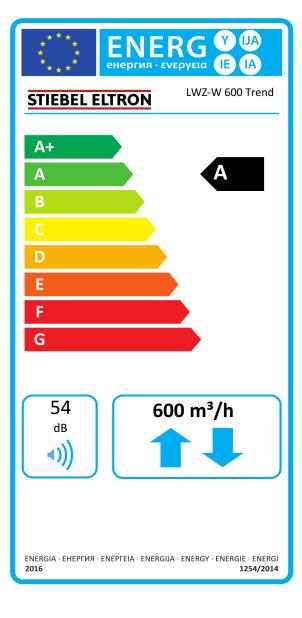

	LWZ-W 600 Trend
	207969
	STIEBEL ELTRON
kWh/(m²a)	-78,27
kWh/(m²a)	-39,99
kWh/(m²a)	-15,44
	A+
	А
	E
	WLA, Zwei Richtungen
	Drehzahlgeregelt
	Rekuperativ
%	87,5
m³/h	600
W	252
dB(A)	54
m³/s	0,117
Pa	50
W/(m³/h)	0,23
	0,85
%	0,78
%	0,59
kWh/a	790
kWh/a	253
kWh/a	208
kWh/a	8930
kWh/a	4565
kWh/a	2064
	kWh/(m²a) kWh/(m²a) kWh/(m²a) kWh/(m²a) % m³/h W dB(A) m³/h W dB(A) m³/s Pa W/(m³/h) % kWh/a kWh/a kWh/a kWh/a

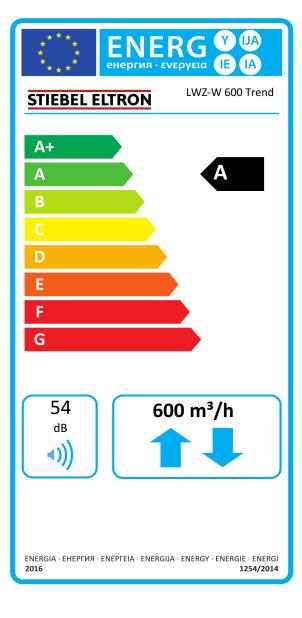

		LWZ-W 600 Trend
		207969
Hersteller		STIEBEL ELTRON
Specific energy consumption in colder climates with time control	kWh/(m²a)	-76,20
Specific energy consumption in moderate climates with time control	kWh/(m²a)	-38,30
Specific energy consumption in warmer climates with time control	kWh/(m²a)	-13,96
Energy efficiency class in colder climates with time control		A+
Energy efficiency class in moderate climates with time control		Α
Energy efficiency class in warmer climates with time control		E
Ventilation unit type		WLA, Zwei Richtungen
Drive type		Drehzahlgeregelt
Heat recovery type		Rekuperativ
Rate of temperature change for heat recovery	%	87,5
Max. air flow rate	m³/h	600
Max. power consumption	W	252
Sound power level LWA	dB(A)	54
Reference air flow rate	m³/s	0,117
Reference pressure differential	Pa	50
Specific power input	W/(m³/h)	0,23
Control factor, time control		0,95
Internal air leakage quota	%	0,78
External air leakage quota	%	0,59
Annual power consumption in colder climates with time control	kWh/a	842
Annual power consumption in moderate climates with time control	kWh/a	305
Annual power consumption in warmer climates with time control	kWh/a	260
Annual heating savings in colder climates with time control	kWh/a	8852
Annual heating savings in moderate climates with time control	kWh/a	4525
Annual heating savings in warmer climates with time control	kWh/a	2046

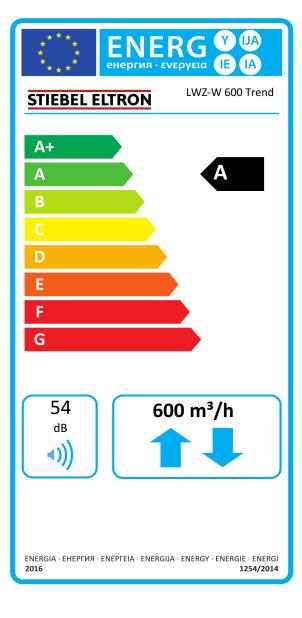

		LWZ-W 600 Trend
		207969
Hersteller		STIEBEL ELTRON
Specific energy consumption in colder climates with manual control	kWh/(m²a)	-75,12
Specific energy consumption in moderate climates with manual control	kWh/(m²a)	-37,27
Specific energy consumption in warmer climates with manual control	kWh/(m²a)	-13,17
Energy efficiency class in colder climates with manual control		A+
Energy efficiency class in moderate climates with manual control		Α
Energy efficiency class in warmer climates with manual control		E
Ventilation unit type		WLA, Zwei Richtungen
Drive type		Drehzahlgeregelt
Heat recovery type		Rekuperativ
Rate of temperature change for heat recovery	%	87,5
Max. air flow rate	m³/h	600
Max. power consumption	W	252
Sound power level LWA	dB(A)	54
Reference air flow rate	m³/s	0,117
Reference pressure differential	Ра	50
Specific power input	W/(m³/h)	0,23
Control factor, manual control		1,00
Internal air leakage quota	%	0,78
External air leakage quota	%	0,59
Annual power consumption in colder climates with manual control	kWh/a	870
Annual power consumption in moderate climates with manual control	kWh/a	333
Annual power consumption in warmer climates with manual control	kWh/a	288
Annual heating savings in colder climates with manual control	kWh/a	8814
Annual heating savings in moderate climates with manual control	kWh/a	4505
Annual heating savings in warmer climates with manual control	kWh/a	2037