



ENERG Y IJA
 енергия · ενέργεια IE IA

STIEBEL ELTRON WPL 07 ACS classic



55 °C

35 °C



A+

A++

52 dB

■ 4	■ 3
■ 3	■ 4
■ 3	■ 3
kW	kW

2019

811/2013

Product datasheet: Room heater to regulation (EU) no. 811/2013

		WPL 07 ACS classic
		235920
Manufacturer		STIEBEL ELTRON
Energy efficiency class for central heating in moderate climates for medium temperature applications		A+
Energy efficiency class for central heating in moderate climates for low temperature applications		A++
Rated heating output in moderate climates for medium temperature applications	kW	3
Rated heating output in moderate climates for low temperature applications	kW	4
Energy efficiency for central heating in moderate climates for medium temperature applications	%	113
Energy efficiency for central heating in moderate climates for low temperature applications	%	166
Energy consumption of central heating in moderate climates for medium temperature applications	kWh/a	2089
Energy consumption for central heating under moderate climatic conditions, for low temperature applications	kWh/a	1769
Rated heating output in colder climates for medium temperature applications	kW	4
Rated heating output in colder climates for low temperature applications	kW	3
Rated heating output in warmer climates for medium temperature applications	kW	3
Rated heating output in warmer climates for low temperature applications	kW	3
Energy efficiency for central heating in colder climates for medium temperature applications	%	105
Energy efficiency for central heating in colder climates for low temperature applications	%	150
Energy efficiency for central heating in warmer climates for medium temperature applications	%	139
Energy efficiency for central heating in warmer climates for low temperature applications	%	204
Energy consumption for central heating under colder climatic conditions, for medium temperature applications	kWh/a	4016
Energy consumption for central heating under colder climatic conditions, for low temperature applications	kWh/a	2186
Energy consumption for central heating under warmer climatic conditions, for medium temperature applications	kWh/a	1187
Energy consumption for central heating under warmer climatic conditions, for low temperature applications	kWh/a	783
Sound power level external	dB(A)	52



ENERG

енергия · ενεργεια

Y

IJA

IE

IA

STIEBEL ELTRON

WPL 07 ACS classic






+ 
 + 
 + 
 + 










		WPL 07 ACS classic
		235920
Manufacturer		STIEBEL ELTRON
Energy efficiency for central heating in moderate climates for medium temperature applications	%	113
Temperature controller class		VI
Contribution of temperature controller to room heating energy efficiency	%	4
Room heating energy efficiency of composite system under moderate climatic conditions	%	117
Room heating energy efficiency of composite system under colder climatic conditions	%	109
Room heating energy efficiency of composite system under warmer climatic conditions	%	143
Value of differential between room heating energy efficiency under moderate climatic conditions and that under colder climatic conditions	%	8
Value of differential between room heating energy efficiency under warmer climatic conditions and that under moderate climatic conditions	%	26
Energy efficiency class for central heating in moderate climates for medium temperature applications		A+
Room heating energy efficiency class of composite system under moderate climatic conditions		A+

		WPL 07 ACS classic
		235920
Manufacturer		STIEBEL ELTRON
Heat source		Outside air
Low temperature heat pump		-
With booster heater		-
Combi boiler with heat pump		-
Rated heating output in moderate climates for medium temperature applications	kW	3
Tj = -7 °C heating output, partial load range under moderate climatic conditions (Pdh)	kW	3,10
Tj = 2 °C heating output, partial load range under moderate climatic conditions (Pdh)	kW	1,60
Tj = 7 °C heating output, partial load range under moderate climatic conditions (Pdh)	kW	1,30
Tj = 12 °C heating output, partial load range under moderate climatic conditions (Pdh)	kW	1,50
Tj = dual mode temperature under moderate climatic conditions (Pdh)	kW	2,40
Tj = operating temperature limit under moderate climatic conditions (Pdh)	kW	3,10
For air/water heat pumps:Tj = -15 °C (if TOL< -20 °C) (Pdh)	kW	0,00
Dual mode temperature (Tbiv)	°C	-5
Tj = -7 °C COP, partial load range under moderate climatic conditions (COPd)		2,07
Tj = 2 °C COP, partial load range under moderate climatic conditions (COPd)		2,93
Tj = 7 °C COP, partial load range under moderate climatic conditions (COPd)		4,13
Tj = 12 °C COP, partial load range under moderate climatic conditions (COPd)		5,97
Tj = dual mode temperature under moderate climatic conditions (COPd)		2,17
Tj = operating temperature limit under moderate climatic conditions (COPd)		2,07
For air/water heat pumps:Tj= -15°C (if TOL< -20 °C) (COPd)		0,00
Heating water operating temperature limit (WTOL)	°C	60
Power consumption, OFF state (Poff)	W	17,000
Power consumption, thermostat OFF state (PTO)	W	30
Standby power consumption (PSB)	W	17,000
Power consumption, operating state, with crankcase heating (PCK)	W	5,000
Booster heater heating output (PSUB)	kW	2,930
Type of energy supply, booster heater		electric
Power control		variable
Sound power level external	dB(A)	52
Flow rate, heat source side	m³/h	1300



ENERG
енергия · ενέργεια



STIEBEL ELTRON HSBB 200 S



55 W

191 L

2017

812/2013

Product datasheet: DHW cylinder to regulation (EU) no. 812/2013



		HSBB 200 S
		235197
Manufacturer		STIEBEL ELTRON
Model identification of the supplier		HSBB 200 S
Energy efficiency class		B
Standby losses	W	55
Cylinder capacity	l	191




ENERG Y IJA
 енергия · ενέργεια IE IA

STIEBEL ELTRON

WPL 07 ACS classic
 compact set S

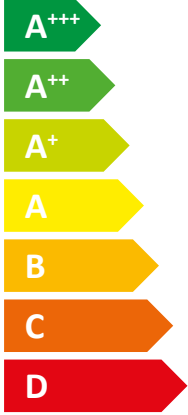

A+

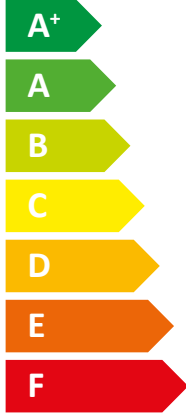

A

52 dB



- 3 kW
- 4 kW
- 3 kW

2019

811/2013

WPL 07 ACS classic compact set S


236629

Manufacturer		STIEBEL ELTRON
Load profile		L
Energy efficiency class for central heating in moderate climates for medium temperature applications		A+
Energy efficiency class for central heating in moderate climates for low temperature applications		A++
Energy efficiency category for DHW heating under moderate climatic conditions		A
Rated heating output in moderate climates for medium temperature applications	kW	3
Rated heating output in moderate climates for low temperature applications	kW	4
Energy consumption of central heating in moderate climates for medium temperature applications	kWh/a	2089
Energy consumption for central heating under moderate climatic conditions, for low temperature applications	kWh/a	1769
Energy consumption for DHW heating under moderate climatic conditions	kWh/a	940
Energy efficiency for central heating in moderate climates for medium temperature applications	%	113
Energy efficiency for central heating in moderate climates for low temperature applications	%	166
Energy efficiency for DHW heating (η_{wh}) under moderate climatic conditions	%	109
Rated heating output in colder climates for medium temperature applications	kW	4
Rated heating output in colder climates for low temperature applications	kW	3
Rated heating output in warmer climates for medium temperature applications	kW	3
Rated heating output in warmer climates for low temperature applications	kW	3
Energy consumption for central heating under colder climatic conditions, for medium temperature applications	kWh/a	4016
Energy consumption for central heating under colder climatic conditions, for low temperature applications	kWh/a	2186
Energy consumption for central heating under warmer climatic conditions, for medium temperature applications	kWh/a	1187
Energy consumption for central heating under warmer climatic conditions, for low temperature applications	kWh/a	783
Energy consumption for DHW heating under colder climatic conditions	kWh/a	949
Energy consumption for DHW heating under warmer climatic conditions	kWh/a	717
Energy efficiency for central heating in colder climates for medium temperature applications	%	105
Energy efficiency for central heating in colder climates for low temperature applications	%	150
Energy efficiency for central heating in warmer climates for medium temperature applications	%	139
Energy efficiency for central heating in warmer climates for low temperature applications	%	204
Energy efficiency for DHW heating (η_{wh}) under colder climatic conditions	%	102
Energy efficiency for DHW heating (η_{wh}) under warmer climatic conditions	%	141
Sound power level external	dB(A)	52



ENERG

енергия · ενέργεια



STIEBEL ELTRON

WPL 07 ACS classic compact set S

Energy label for heating system showing a boiler icon, an A+ energy class arrow, a radiator icon, an A energy class arrow, and a tap icon.

Energy scale for heating system showing a radiator icon, a scale from A+++ (green) to G (red), and an A+ energy class arrow.

Energy label for ACS system showing a solar panel icon, a hot water tank icon, a keypad icon, a boiler icon, and checkboxes for each component.

Energy scale for ACS system showing a tap icon, a scale from A+++ (green) to G (red), and an A energy class arrow.

Product datasheet: Composite system consisting of room heater and temperature controller to regulation (EU) no. 811/2013

		WPL 07 ACS classic compact set S
		236629
Manufacturer		STIEBEL ELTRON
Energy efficiency for central heating in moderate climates for medium temperature applications	%	113
Temperature controller class		VI
Contribution of temperature controller to room heating energy efficiency	%	4
Room heating energy efficiency of composite system under moderate climatic conditions	%	117
Room heating energy efficiency of composite system under colder climatic conditions	%	109
Room heating energy efficiency of composite system under warmer climatic conditions	%	143
Value of differential between room heating energy efficiency under moderate climatic conditions and that under colder climatic conditions	%	8
Value of differential between room heating energy efficiency under warmer climatic conditions and that under moderate climatic conditions	%	26
Energy efficiency class for central heating in moderate climates for medium temperature applications		A+
Room heating energy efficiency class of composite system under moderate climatic conditions		A+
Energy efficiency category for DHW heating under moderate climatic conditions		A
Load profile		L

WPL 07 ACS classic compact set S

236629

Manufacturer		STIEBEL ELTRON
Heat source		Outside air
Low temperature heat pump		-
With booster heater		x
Combi boiler with heat pump		x
Rated heating output in moderate climates for medium temperature applications	kW	3
Tj = -7 °C heating output, partial load range under moderate climatic conditions (Pdh)	kW	3,1
Tj = 2 °C heating output, partial load range under moderate climatic conditions (Pdh)	kW	1,6
Tj = 7 °C heating output, partial load range under moderate climatic conditions (Pdh)	kW	1,3
Tj = 12 °C heating output, partial load range under moderate climatic conditions (Pdh)	kW	1,5
Tj = dual mode temperature under moderate climatic conditions (Pdh)	kW	2,4
Tj = operating temperature limit under moderate climatic conditions (Pdh)	kW	3,1
For air/water heat pumps:Tj = -15 °C (if TOL < -20 °C) (Pdh)	kW	0
Dual mode temperature (Tbiv)	°C	-5
Tj = -7 °C COP, partial load range under moderate climatic conditions (COPd)		2,07
Tj = 2 °C COP, partial load range under moderate climatic conditions (COPd)		2,93
Tj = 7 °C COP, partial load range under moderate climatic conditions (COPd)		4,13
Tj = 12 °C COP, partial load range under moderate climatic conditions (COPd)		5,97
Tj = dual mode temperature under moderate climatic conditions (COPd)		2,17
Tj = operating temperature limit under moderate climatic conditions (COPd)		2,07
For air/water heat pumps:Tj = -15 °C (if TOL < -20 °C) (COPd)		0
Operating temperature limit (Tol)	°C	-7
Heating water operating temperature limit (WTOL)	°C	60
Power consumption, OFF state (Poff)	W	17
Power consumption, thermostat OFF state (PTO)	W	30
Standby power consumption (PSB)	W	17
Power consumption, operating state, with crankcase heating (PCK)	W	5
Booster heater heating output (PSUB)	kW	2,93
Type of energy supply, booster heater		electric
Power control		variable
Sound power level external	dB(A)	52
Flow rate, heat source side	m ³ /h	1300
Load profile		L
Energy efficiency for DHW heating (η_{wh}) under moderate climatic conditions	%	109