




	VLR 70 S Trend EN
	200002
	STIEBEL ELTRON
kWh/(m²a)	-87,86
kWh/(m²a)	-43,91
kWh/(m²a)	-18,74
	A+
	A+
	E
	WLA, Zwei Richtungen
	Drehzahlgeregelt
	Regenerativ
%	86,6
m³/h	70
W	12
dB(A)	47
m³/s	0,014
Pa	50
W/(m³/h)	0,14
	0,65
	Visual filter change warning signal on the remote control display. Please note that regular filter changes are important for good system energy efficiency
	not applicable
%	22,9 / 22,9
m³/h	0,20
kWh/a	82
kWh/a	82
kWh/a	82
kWh/a	8990
kWh/a	4595
kWh/a	2078
	kWh/(m²a) kWh/(m²a)  // kWh/(m²a)  // m³/h  // W  // dB(A)  // m³/h  // Pa  // W/(m³/h)  // kWh/a  // kWh/a  // kWh/a  // kWh/a  // kWh/a

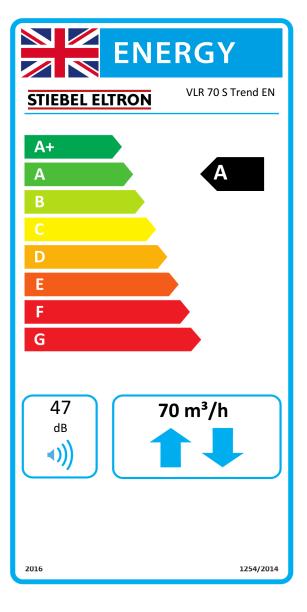

		VLR 70 S Trend EN
Manufacturar		200002
Manufacturer Specific energy consumption under colder climate conditions with		STIEBEL ELTRON
central demand-dependent control	kWh/(m²a)	-84,57
Specific energy consumption under average climate conditions with central demand-dependent control	kWh/(m²a)	-41,53
Specific energy consumption under warmer climate conditions with central demand-dependent control	kWh/(m²a)	-16,87
Energy efficiency class under colder climate conditions with central demand-dependent control		A+
Energy efficiency class under average climate conditions with central demand-dependent control		А
Energy efficiency class under warmer climate conditions with central demand-dependent control		E
Ventilation unit type		WLA, Zwei Richtungen
Drive type		Drehzahlgeregelt
Heat recovery type		Regenerativ
Rate of temperature change for heat recovery	%	86,6
Max. air flow rate	m³/h	70
Max. power consumption	W	12
Sound power level LWA	dB(A)	47
Reference air flow rate	m³/s	0,014
Reference pressure differential	Pa	50
Specific power input	W/(m³/h)	0,14
Control factor, central demand-dependent control		0,85
Filter change indicator		Visual filter change warning signal on the remote control display. Please note that regular filter changes are important for good system energy efficiency
Instructions for controllable outdoor air grilles with ELA		not applicable
Sensitivity to pressure fluctuations	%	22,9 / 22,9
Airtightness between indoors and outdoors	m³/h	0,20
Annual power consumption under colder climate conditions with central demand-dependent control	kWh/a	139
Annual power consumption under average climate conditions with central demand-dependent control	kWh/a	139
Annual power consumption under warmer climate conditions with central demand-dependent control	kWh/a	139
Annual heating savings under colder climate conditions with central demand-dependent control	kWh/a	8806
Annual heating savings under average climate conditions with central demand-dependent control	kWh/a	4501
Annual heating savings under warmer climate conditions with central demand-dependent control	kWh/a	2035

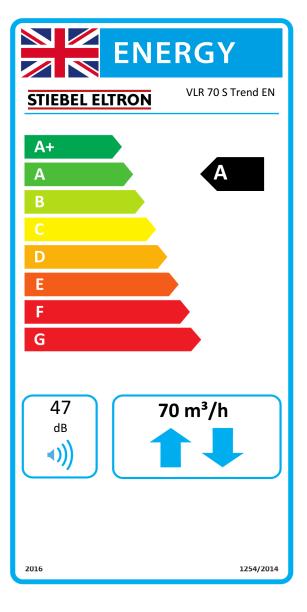

		VLR 70 S Trend EN
		200002
Manufacturer		STIEBEL ELTRON
Specific energy consumption under colder climate conditions with time control	kWh/(m²a)	-82,79
Specific energy consumption under average climate conditions with time control	kWh/(m²a)	-40,19
Specific energy consumption under warmer climate conditions with time control	kWh/(m²a)	-15,79
Energy efficiency class under colder climate conditions with time control		A+
Energy efficiency class under average climate conditions with time control		A
Energy efficiency class under warmer climate conditions with time control		E
Ventilation unit type		WLA, Zwei Richtungen
Drive type		Drehzahlgeregelt
Heat recovery type		Regenerativ
Rate of temperature change for heat recovery	%	86,6
Max. air flow rate	m³/h	70
Max. power consumption	W	12
Sound power level LWA	dB(A)	47
Reference air flow rate	m³/s	0,014
Reference pressure differential	Pa	50
Specific power input	W/(m³/h)	0,14
Control factor, time control		0,95
Filter change indicator		Visual filter change warning signal on the remote control display. Please note that regular filter changes are important for good system energy efficiency
Instructions for controllable outdoor air grilles with ELA		not applicable
Sensitivity to pressure fluctuations	%	22,9 / 22,9
Airtightness between indoors and outdoors	m³/h	0,20
Annual power consumption under colder climate conditions with time control	kWh/a	174
Annual power consumption under average climate conditions with time control	kWh/a	174
Annual power consumption under warmer climate conditions with time control	kWh/a	174
Annual heating savings under colder climate conditions with time control	kWh/a	8714
Annual heating savings under average climate conditions with time control	kWh/a	4454
Annual heating savings under warmer climate conditions with time control	kWh/a	2014

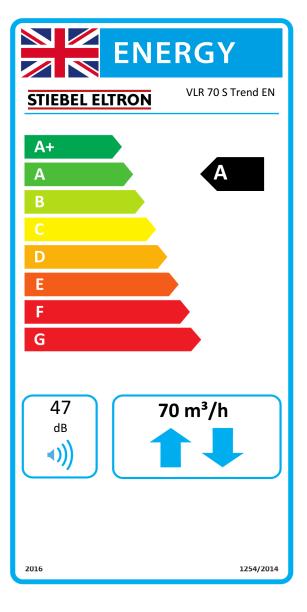

	VLR 70 S Trend EN
	200002
	STIEBEL ELTRON
kWh/(m²a)	-81,86
kWh/(m²a)	-39,49
kWh/(m²a)	-15,21
	A+
	A
	E
	WLA, Zwei Richtungen
	Drehzahlgeregelt
	Regenerativ
%	86,6
m³/h	70
W	12
dB(A)	47
m³/s	0,014
Pa	50
W/(m³/h)	0,14
	1,00
	Visual filter change warning signal on the remote control display. Please note that regular filter changes are important for good system energy efficiency
	not applicable
%	22,9 / 22,9
m³/h	0,20
kWh/a	193
kWh/a	193
kWh/a	193
kWh/a	8668
kWh/a	4431
kWh/a	2004
	kWh/(m²a) kWh/(m²a)  // kWh/(m²a)  // m³/h  // W  // dB(A)  // m³/s  Pa  // W/(m³/h)  // kWh/a  // kWh/a  // kWh/a  // kWh/a