



Product datasheet: Mechanical ventilation unit to Regulation (EU) No. 1254/2014 | 1253/2014

Manufacturer		190319
Manufacturer		
		tecalor
Specific energy consumption under colder climate conditions with central demand-dependent control	kWh/(m²a)	-80,31
Specific energy consumption under average climate conditions with central demand-dependent control	kWh/(m²a)	-41,58
Specific energy consumption under warmer climate conditions with central demand-dependent control	kWh/(m²a)	-16,55
Energy efficiency class under colder climate conditions with central demand-dependent control		A+
Energy efficiency class under average climate conditions with central demand-dependent control		А
Energy efficiency class under warmer climate conditions with central demand-dependent control		Е
Ventilation unit type		Zwei Richtungen
Drive type		Drehzahlgeregelt
Heat recovery type		Rekuperativ
Rate of temperature change for heat recovery	%	89,3
Max. air flow rate	m³/h	250
Max. power consumption	W	65
Sound power level LWA	dB(A)	43
Reference air flow rate	m³/s	0,049
Reference pressure differential	Pa	50
Specific power input	W/(m³/h)	0,18
Control factor, central demand-dependent control		0,85
Internal air leakage quota	%	0,63
External air leakage quota	%	0,44
Annual power consumption under colder climate conditions with central demand-dependent control	kWh/a	754
Annual power consumption under average climate conditions with central demand-dependent control	kWh/a	217
Annual power consumption under warmer climate conditions with central demand-dependent control	kWh/a	172
Annual heating savings under colder climate conditions with central demand-dependent control	kWh/a	9020
Annual heating savings under average climate conditions with central demand-dependent control	kWh/a	4611
Annual heating savings under warmer climate conditions with central demand-dependent control	kWh/a	2085

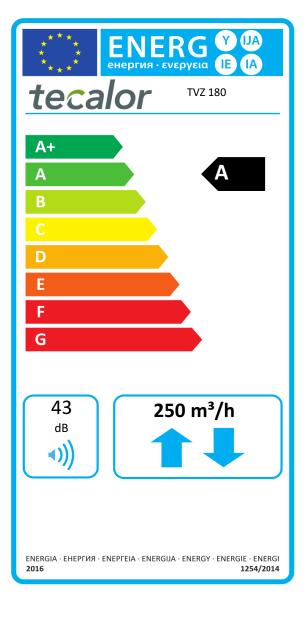

Product datasheet: Mechanical ventilation unit to Regulation (EU) No. 1254/2014 | 1253/2014

		TVZ 180	
		190319	
Manufacturer		tecalor	
Specific energy consumption under colder climate conditions with time control	kWh/(m²a)	-78,34	
Specific energy consumption under average climate conditions with time control	kWh/(m²a)	-39,95	
Specific energy consumption under warmer climate conditions with time control	kWh/(m²a)	-16,78	
Energy efficiency class under colder climate conditions with time control		A+	
Energy efficiency class under average climate conditions with time control		А	
Energy efficiency class under warmer climate conditions with time control		E	
Ventilation unit type		Zwei Richtungen	
Drive type		Drehzahlgeregelt	
Heat recovery type		Rekuperativ	
Rate of temperature change for heat recovery	%	89,3	
Max. air flow rate	m³/h	250	
Max. power consumption	W	65	
Sound power level LWA	dB(A)	43	
Reference air flow rate	m³/s	0,049	
Reference pressure differential	Pa	50	
Specific power input	W/(m³/h)	0,18	
Control factor, time control		0,95	
Internal air leakage quota	%	0,63	
External air leakage quota	%	0,44	
Annual power consumption under colder climate conditions with time control	kWh/a	797	
Annual power consumption under average climate conditions with time control	kWh/a	260	
Annual power consumption under warmer climate conditions with time control	kWh/a	215	
Annual heating savings under colder climate conditions with time control	kWh/a	8953	
Annual heating savings under average climate conditions with time control	kWh/a	4577	
Annual heating savings under warmer climate conditions with time control	kWh/a	2069	

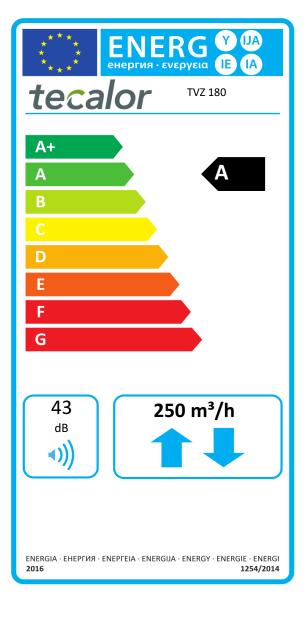

Product datasheet: Mechanical ventilation unit to Regulation (EU) No. 1254/2014 | 1253/2014

		TVZ 180	
		190319	
Manufacturer		tecalor	
Specific energy consumption under colder climate conditions with manual control	kWh/(m²a)	-77,43	
Specific energy consumption under average climate conditions with manual control	kWh/(m²a)	-39,20	
Specific energy consumption under warmer climate conditions with manual control	kWh/(m²a)	-14,67	
Energy efficiency class under colder climate conditions with manual control		Α+	
Energy efficiency class under average climate conditions with manual control		А	
Energy efficiency class under warmer climate conditions with manual control		Е	
Ventilation unit type		Zwei Richtungen	
Drive type		Drehzahlgeregelt	
Heat recovery type		Rekuperativ	
Rate of temperature change for heat recovery	%	89,3	
Max. air flow rate	m³/h	250	
Max. power consumption	W	65	
Sound power level LWA	dB(A)	43	
Reference air flow rate	m³/s	0,049	
Reference pressure differential	Pa	50	
Specific power input	W/(m³/h)	0,18	
Control factor, manual control		1,00	
Internal air leakage quota	%	0,63	
External air leakage quota	%	0,44	
Annual power consumption under colder climate conditions with manual control	kWh/a	820	
Annual power consumption under average climate conditions with manual control	kWh/a	283	
Annual power consumption under warmer climate conditions with manual control	kWh/a	238	
Annual heating savings under colder climate conditions with manual control	kWh/a	8920	
Annual heating savings under average climate conditions with manual control	kWh/a	4560	
Annual heating savings under warmer climate conditions with manual control	kWh/a	2062	