



ENERG  
енергия · ενεργεια




tecalor

TTF 66



55 °C

35 °C

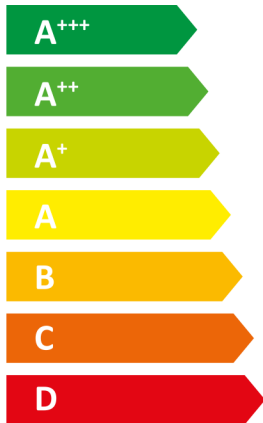

A<sup>++</sup>

A<sup>+++</sup>



63 dB



63 dB

■ 78

■ 62

■ 62

kW

■ 83

■ 67

■ 67

kW



2019

811/2013

|  |       | TTF 66  |
|--|-------|---------|
|  |       | 190368  |
| Manufacturer   |       | tecalor |
| Space heating energy efficiency class under average climate conditions, medium-temperature applications                    |       | A++     |
| Energy efficiency class, space heating under average climate conditions, low-temperature applications                      |       | A+++    |
| Rated heating output under average climate conditions for medium-temperature applications (P rated)                        | kW    | 62      |
| Rated heating output under average climate conditions for low-temperature applications (P rated)                           | kW    | 67      |
| Seasonal space heating energy efficiency under average climate conditions for medium-temperature applications ( $\eta_s$ ) | %     | 131     |
| Seasonal space heating energy efficiency under average climate conditions for low-temperature applications ( $\eta_s$ )    | %     | 190     |
| Annual energy consumption under average climate conditions for medium-temperature applications (QHE)                       | kWh/a | 37120   |
| Annual energy consumption under average climate conditions for low-temperature applications (QHE)                          | kWh/a | 28022   |
| Sound power level, indoor  | dB(A) | 63      |
| Rated heating output under colder climate conditions for medium-temperature applications (P rated)                         | kW    | 78      |
| Rated heating output under colder climate conditions for low-temperature applications (P rated)                            | kW    | 83      |
| Rated heating output under warmer climate conditions for medium-temperature applications (P rated)                         | kW    | 62      |
| Rated heating output under warmer climate conditions for low-temperature applications (P rated)                            | kW    | 67      |
| Seasonal space heating energy efficiency under colder climate conditions for medium-temperature applications ( $\eta_s$ )  | %     | 136     |
| Seasonal space heating energy efficiency under colder climate conditions for low-temperature applications ( $\eta_s$ )     | %     | 197     |
| Seasonal space heating energy efficiency under warmer climate conditions for medium-temperature applications ( $\eta_s$ )  | %     | 130     |
| Seasonal space heating energy efficiency under warmer climate conditions for low-temperature applications ( $\eta_s$ )     | %     | 190     |
| Annual energy consumption under colder climate conditions for medium-temperature applications (QHE)                        | kWh/a | 53447   |
| Annual energy consumption under colder climate conditions for low-temperature applications (QHE)                           | kWh/a | 39996   |
| Annual energy consumption under warmer climate conditions for medium-temperature applications (QHE)                        | kWh/a | 24059   |
| Annual energy consumption under warmer climate conditions for low-temperature applications (QHE)                           | kWh/a | 18119   |
| Sound power level, outdoor   | dB(A) | 63      |



ENERG  
енергия · ενέργεια

Y

IJA

IE

IA

tecalor

TTF 66



A<sup>++</sup>

A<sup>+++</sup>

A<sup>++</sup>

A<sup>++</sup>

A<sup>+</sup>

A

B

C


D

E

F

G

+



+



+



+



Product datasheet: Space heater to Regulation (EU) No 811/2013 (S.I. 2019 No. 539 / Programme 2)

|   |   |               |
|---|---|---------------|
|   |   | <b>TTF 66</b> |
|   |   | 190368        |
| Manufacturer  |   | tecalor       |
| Seasonal space heating energy efficiency under average climate conditions for low-temperature applications ( $\eta_s$ )                 | % | 190           |
| Temperature control class   |   | VII           |
| Contribution of temperature control to space heating energy efficiency  | % | 4             |
| Space heating energy efficiency of package under average climate conditions   | % | 135           |
| Space heating energy efficiency of package under colder climate conditions  | % | 140           |
| Space heating energy efficiency of package under warmer climate conditions  | % | 134           |
| Value of differential between space heating energy efficiency under average climate conditions and that under colder climate conditions | % | 5             |
| Value of differential between space heating energy efficiency under warmer climate conditions and that under average climate conditions | % | 1             |
| Energy efficiency class, space heating under average climate conditions, low-temperature applications                                   |   | A+++          |
| Space heating energy efficiency class of package under average climate conditions   |   | A++           |

**Product datasheet: Space heater to Regulation (EU) No 811/2013 (S.I. 2019 No. 539 / Programme 2)**

|  |    | <b>TTF 66</b> |
|--|----|---------------|
|  |    | 190368        |
| Manufacturer   |    | tecalor       |
| Heat source  |    | Sole          |
| With auxiliary heater  |    | -             |
| Combination heater with heat pump  |    | -             |
| Rated heating output under colder climate conditions for medium-temperature applications (P rated)                 | kW | 78            |
| Rated heating output under average climate conditions for medium-temperature applications (P rated)                | kW | 62            |
| Rated heating output under warmer climate conditions for medium-temperature applications (P rated)                 | kW | 62            |
| Tj = -7 °C heating output, partial load range under colder climate conditions (Pdh)                                | kW | 64,4          |
| Tj = -7 °C heating output, partial load range under average climate conditions (Pdh)                               | kW | 62,8          |
| Tj = 2 °C heating output, partial load range under colder climate conditions (Pdh)                                 | kW | 65,5          |
| Tj = 2 °C heating output, partial load range under average climate conditions (Pdh)                                | kW | 64,5          |
| Tj = 2 °C heating output, partial load range under warmer climate conditions (Pdh)                                 | kW | 62,3          |
| Tj = 7 °C heating output, partial load range under colder climate conditions (Pdh)                                 | kW | 66,3          |
| Tj = 7 °C heating output, partial load range under average climate conditions (Pdh)                                | kW | 65,5          |
| Tj = 7 °C heating output, partial load range under warmer climate conditions (Pdh)                                 | kW | 63,7          |
| Tj = 12 °C heating output, partial load range under colder climate conditions (Pdh)                                | kW | 67,0          |
| Tj = 12 °C heating output, partial load range under average climate conditions (Pdh)                               | kW | 66,5          |
| Tj = 12 °C heating output, partial load range under warmer climate conditions (Pdh)                                | kW | 65,9          |
| Tj = dual mode temperature under colder climate conditions (Pdh)   | kW | 63,7          |
| Tj = dual mode temperature under average climate conditions (Pdh)  | kW | 62,3          |
| Tj = dual mode temperature under warmer climate conditions (Pdh)   | kW | 62,3          |
| Tj = operating temperature limit under colder climate conditions (Pdh)   | kW | 62,3          |
| Tj = operating temperature limit under average climate conditions (Pdh)  | kW | 62,3          |
| Tj = operating temperature limit under warmer climate conditions (Pdh)   | kW | 62,3          |
| For air source heat pumps: Tj = -15 °C (if TOL< -20 °C) (Pdh)  | kW | 62,3          |
| Dual mode temperature under colder climate conditions (Tbiv)   | °C | -15           |
| Dual mode temperature under average climate conditions (Tbiv)  | °C | -10           |
| Dual mode temperature under warmer climate conditions (Tbiv)   | °C | 2             |
| Seasonal space heating energy efficiency under colder climate conditions for medium-temperature applications (ηs)  | %  | 136           |
| Seasonal space heating energy efficiency under average climate conditions for medium-temperature applications (ηs) | %  | 131           |
| Seasonal space heating energy efficiency under warmer climate conditions for medium-temperature applications (ηs)  | %  | 130           |
| Tj = -7 °C COP, partial load range under colder climate conditions (COPd)  |    | 3,42          |
| Tj = -7 °C COP, partial load range under average climate conditions (COPd)   |    | 2,94          |
| Tj = 2 °C COP, partial load range under colder climate conditions (COPd)   |    | 3,81          |
| Tj = 2 °C COP, partial load range under average climate conditions (COPd)  |    | 3,44          |
| Tj = 2 °C COP, partial load range under warmer climate conditions (COPd)   |    | 2,82          |
| Tj = 7 °C COP, partial load range under colder climate conditions (COPd)   |    | 4,18          |
| Tj = 7 °C COP, partial load range under average climate conditions (COPd)  |    | 3,82          |
| Tj = 7 °C COP, partial load range under warmer climate conditions (COPd)   |    | 3,20          |

|  |       |            |
|--|-------|------------|
| Tj = 12 °C COP, partial load range under colder climate conditions (COPd)                            |       | 4,49       |
| Tj = 12 °C COP, partial load range under average climate conditions (COPd)                           |       | 428,00     |
| Tj = 12 °C COP, partial load range under warmer climate conditions (COPd)                            |       | 3,96       |
| Tj = dual mode temperature under colder climate conditions (COPd)                                    |       | 3,21       |
| Tj = dual mode temperature under average climate conditions (COPd)                                   |       | 2,82       |
| Tj = dual mode temperature under warmer climate conditions (COPd)                                    |       | 2,82       |
| Tj = operating temperature limit under colder climate conditions (COPd)                              |       | 2,82       |
| Tj = operating temperature limit under average climate conditions (COPd)                             |       | 2,82       |
| Tj = operating temperature limit under warmer climate conditions (COPd)                              |       | 2,82       |
| For air source heat pumps: Tj = -15 °C (if TOL < -20 °C) (COPd)                                      |       | 2,82       |
| Operating temperature limit of heating water under average climate conditions (WTOL)                 | °C    | 60         |
| Power consumption, off-mode (Poff)   | W     | 0          |
| Power consumption, thermostat off-mode (PTO)   | W     | 7          |
| Power consumption, standby state (PSB)   | W     | 7          |
| Power consumption, operating state, with crankcase heating (PCK)                                     | W     | 99         |
| Rated heating output of auxiliary heater under average climate conditions (PSUP)                     | kW    | 0,0        |
| Type of energy supply, auxiliary heater  |       | elektrisch |
| Output control   |       | fest       |
| Sound power level, outdoor   | dB(A) | 63         |
| Sound power level, indoor  | dB(A) | 63         |
| Annual energy consumption under colder climate conditions for medium-temperature applications (QHE)  | kWh/a | 53447      |
| Annual energy consumption under average climate conditions for medium-temperature applications (QHE) | kWh/a | 37120      |
| Annual energy consumption under warmer climate conditions for medium-temperature applications (QHE)  | kWh/a | 24059      |
| Flow rate on heat source side  | m³/h  | 161        |