





**ENERG** Y IJA  
енергия · ενεργεια IE IA

**STIEBEL ELTRON**

WPL-SET 9 kW

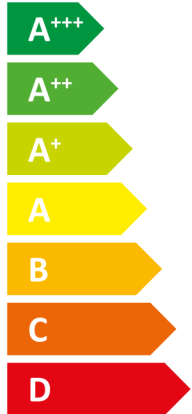

**A++**



- 11 kW
- 8 kW
- 6 kW

2019

811/2013

**Product datasheet: Combination heater to Regulation (EU) No 811/2013 (S.I. 2019 No. 539 / Programme 2)**

|  |       | <b>WPL-SET 9 kW</b> |
|--|-------|---------------------|
|  |       | 201897              |
| Manufacturer   |       | STIEBEL ELTRON      |
| Load profile   |       | -                   |
| Space heating energy efficiency class under average climate conditions, medium-temperature applications (A+++ -> D)        |       | A++                 |
| Energy efficiency class, space heating under average climate conditions, low-temperature applications (A+++ -> D)          |       | A+++                |
| Energy efficiency class, DHW heating under average climate conditions (A+++ -> D)  |       | -                   |
| Rated heating output under average climate conditions for medium-temperature applications (P rated)                        | kW    | 8                   |
| Rated heating output under average climate conditions for low-temperature applications (P rated)                           | kW    | 7                   |
| Annual energy consumption under average climate conditions for medium-temperature applications (QHE)                       | kWh/a | 4865                |
| Annual energy consumption under average climate conditions for low-temperature applications (QHE)                          | kWh/a | 3120                |
| Annual power consumption under average climate conditions (AEC)  |       | -                   |
| Seasonal space heating energy efficiency under average climate conditions for medium-temperature applications ( $\eta_s$ ) | %     | 125                 |
| Seasonal space heating energy efficiency under average climate conditions for low-temperature applications ( $\eta_s$ )    | %     | 177                 |
| Energy efficiency, DHW heating ( $\eta_{wh}$ ), under average climate conditions   |       | -                   |
| Sound power level, indoor  |       | -                   |
| Option for operation only at off-peak times  |       | -                   |
| Rated heating output under colder climate conditions for medium-temperature applications (P rated)                         | kW    | 11                  |
| Rated heating output under colder climate conditions for low-temperature applications (P rated)                            | kW    | 6                   |
| Rated heating output under warmer climate conditions for medium-temperature applications (P rated)                         | kW    | 6                   |
| Rated heating output under warmer climate conditions for low-temperature applications (P rated)                            | kW    | 6                   |
| Annual energy consumption under colder climate conditions for medium-temperature applications (QHE)                        | kWh/a | 10193               |
| Annual energy consumption under colder climate conditions for low-temperature applications (QHE)                           | kWh/a | 3713                |
| Annual energy consumption under warmer climate conditions for medium-temperature applications (QHE)                        | kWh/a | 2048                |
| Annual energy consumption under warmer climate conditions for low-temperature applications (QHE)                           | kWh/a | 1556                |
| Annual power consumption under colder climate conditions (AEC)   |       | -                   |
| Annual power consumption under warmer climate conditions (AEC)   |       | -                   |
| Seasonal space heating energy efficiency under colder climate conditions for medium-temperature applications ( $\eta_s$ )  | %     | 103                 |
| Seasonal space heating energy efficiency under colder climate conditions for low-temperature applications ( $\eta_s$ )     | %     | 151                 |
| Seasonal space heating energy efficiency under warmer climate conditions for medium-temperature applications ( $\eta_s$ )  | %     | 153                 |
| Seasonal space heating energy efficiency under warmer climate conditions for low-temperature applications ( $\eta_s$ )     | %     | 213                 |
| Seasonal space heating energy efficiency under warmer climate conditions for low-temperature applications ( $\eta_s$ )     | %     | 213                 |
| Energy efficiency, DHW heating ( $\eta_{wh}$ ), warmer climates  |       | -                   |
| Sound power level, outdoor   | dB(A) | 57                  |



# ENERG

енергия · ενεργεια



WPL-SET 9 kW


## STIEBEL ELTRON



A<sup>++</sup>



-



A<sup>+++</sup>

A<sup>++</sup>

A<sup>+</sup>

A

B

C

D


E

F

G

A<sup>++</sup>

+



+



+



+



A<sup>+++</sup>

A<sup>++</sup>

A<sup>+</sup>

A

B

C

D

E

F

G

-

**Product datasheet: Combination heater to Regulation (EU) No 811/2013 (S.I. 2019 No. 539 / Programme 2)**

|   |   | <b>WPL-SET 9 kW</b> |
|---|---|---------------------|
|   |   | 201897              |
| Manufacturer  |   | STIEBEL ELTRON      |
| Seasonal space heating energy efficiency under average climate conditions for medium-temperature applications ( $\eta_s$ )              | % | 125                 |
| Temperature control class   |   | VI                  |
| Contribution of temperature control to space heating energy efficiency  | % | 4                   |
| Space heating energy efficiency of package under average climate conditions   | % | 129                 |
| Space heating energy efficiency of package under colder climate conditions  | % | 107                 |
| Space heating energy efficiency of package under warmer climate conditions  | % | 156                 |
| Value of differential between space heating energy efficiency under average climate conditions and that under colder climate conditions | % | 22                  |
| Value of differential between space heating energy efficiency under warmer climate conditions and that under average climate conditions | % | 27                  |
| Space heating energy efficiency class under average climate conditions, medium-temperature applications (A+++ -> D)                     |   | A++                 |
| Space heating energy efficiency class of package under average climate conditions (A+++ -> D)   |   | A++                 |
| Energy efficiency class, DHW heating under average climate conditions (A+++ -> D)   |   | -                   |
| Load profile  |   | -                   |

**Product datasheet: Combination heater to Regulation (EU) No 811/2013 (S.I. 2019 No. 539 / Programme 2)**

|  |        | <b>WPL-SET 9 kW</b> |
|--|--------|---------------------|
|  |        | 201897              |
| Manufacturer   |        | STIEBEL ELTRON      |
| Heat source  |        | Luft                |
| Low temperature heat pump  |        | -                   |
| With auxiliary heater  |        | -                   |
| Combination heater with heat pump  |        | -                   |
| Rated heating output under colder climate conditions for medium-temperature applications (P rated)                 | kW     | 11                  |
| Rated heating output under average climate conditions for medium-temperature applications (P rated)                | kW     | 8                   |
| Rated heating output under warmer climate conditions for medium-temperature applications (P rated)                 | kW     | 6                   |
| Tj = -7 °C heating output, partial load range under colder climate conditions (Pdh)                                | kW     | 6.6                 |
| Tj = -7 °C heating output, partial load range under average climate conditions (Pdh)                               | kW     | 5.1                 |
| Tj = 2 °C heating output, partial load range under colder climate conditions (Pdh)                                 | kW     | 4                   |
| Tj = 2 °C heating output, partial load range under average climate conditions (Pdh)                                | kW     | 4.1                 |
| Tj = 2 °C heating output, partial load range under warmer climate conditions (Pdh)                                 | kW     | 6                   |
| Tj = 7 °C heating output, partial load range under colder climate conditions (Pdh)                                 | kW     | 2.7                 |
| Tj = 7 °C heating output, partial load range under average climate conditions (Pdh)                                | kW     | 2.6                 |
| Tj = 7 °C heating output, partial load range under warmer climate conditions (Pdh)                                 | kW     | 3.9                 |
| Tj = 12 °C heating output, partial load range under colder climate conditions (Pdh)                                | kW     | 3.4                 |
| Tj = 12 °C heating output, partial load range under average climate conditions (Pdh)                               | kW     | 3.3                 |
| Tj = 12 °C heating output, partial load range under warmer climate conditions (Pdh)                                | kW     | 3.3                 |
| Tj = dual mode temperature under colder climate conditions (Pdh)   | kW     | 6.6                 |
| Tj = dual mode temperature under average climate conditions (Pdh)  | kW     | 6.1                 |
| Tj = dual mode temperature under warmer climate conditions (Pdh)   | kW     | 6                   |
| Tj = operating temperature limit under colder climate conditions (Pdh)   | kW     | 1.8                 |
| Tj = operating temperature limit under average climate conditions (Pdh)  | kW     | 5.1                 |
| Tj = operating temperature limit under warmer climate conditions (Pdh)   | kW     | 6                   |
| For air source heat pumps: Tj = -15 °C (if TOL< -20 °C) (Pdh)  | kW     | 0                   |
| Dual mode temperature under colder climate conditions (Tbiv)   | Grad C | -7                  |
| Dual mode temperature under average climate conditions (Tbiv)  | Grad C | -5                  |
| Dual mode temperature under warmer climate conditions (Tbiv)   | Grad C | 2                   |
| Seasonal space heating energy efficiency under colder climate conditions for medium-temperature applications (ηs)  | %      | 103                 |
| Seasonal space heating energy efficiency under average climate conditions for medium-temperature applications (ηs) | %      | 125                 |
| Seasonal space heating energy efficiency under warmer climate conditions for medium-temperature applications (ηs)  | %      | 153                 |
| Tj = -7 °C COP, partial load range under colder climate conditions (COPd)  |        | 2.4                 |
| Tj = -7 °C COP, partial load range under average climate conditions (COPd)   |        | 2                   |
| Tj = 2 °C COP, partial load range under colder climate conditions (COPd)   |        | 3.6                 |
| Tj = 2 °C COP, partial load range under average climate conditions (COPd)  |        | 3.2                 |
| Tj = 2 °C COP, partial load range under warmer climate conditions (COPd)   |        | 2.2                 |
| Tj = 7 °C COP, partial load range under colder climate conditions (COPd)   |        | 5                   |
| Tj = 7 °C COP, partial load range under average climate conditions (COPd)  |        | 4.6                 |

|  |        |              |
|--|--------|--------------|
| Tj = 7 °C COP, partial load range under warmer climate conditions (COPd)   |        | 3.2          |
| Tj = 12 °C COP, partial load range under colder climate conditions (COPd)  |        | 6.2          |
| Tj = 12 °C COP, partial load range under average climate conditions (COPd)   |        | 6            |
| Tj = 12 °C COP, partial load range under warmer climate conditions (COPd)  |        | 5.7          |
| Tj = dual mode temperature under colder climate conditions (COPd)  |        | 2.4          |
| Tj = dual mode temperature under average climate conditions (COPd)   |        | 2.3          |
| Tj = dual mode temperature under warmer climate conditions (COPd)  |        | 2.2          |
| Tj = operating temperature limit under colder climate conditions (COPd)  |        | 1.4          |
| Tj = operating temperature limit under average climate conditions (COPd)   |        | 2            |
| Tj = operating temperature limit under warmer climate conditions (COPd)  |        | 2.2          |
| For air source heat pumps: Tj = -15 °C (if TOL < -20 °C) (COPd)  |        | 0            |
| Operating temperature limit under colder climate conditions (TOL)  | Grad C | -15          |
| Operating temperature limit under average climate conditions (TOL)   | Grad C | -10          |
| Operating temperature limit under warmer climate conditions (TOL)  | Grad C | 2            |
| Operating temperature limit of heating water under colder climate conditions (WTOL)                                    | Grad C | 60           |
| Operating temperature limit of heating water under average climate conditions (WTOL)                                   | Grad C | 60           |
| Operating temperature limit of heating water under warmer climate conditions (WTOL)                                    | Grad C | 60           |
| Power consumption, off-mode (Poff)   | Watt   | 17           |
| Power consumption, thermostat off-mode (PTO)   | Watt   | 30           |
| Power consumption, standby state (PSB)   | Watt   | 17           |
| Power consumption, operating state, with crankcase heating (PCK)   | Watt   | 5            |
| Rated heating output of auxiliary heater under colder climate conditions (PSUP)  | kW     | 10.9         |
| Rated heating output of auxiliary heater under average climate conditions (PSUP)                                       | kW     | 8            |
| Rated heating output of auxiliary heater under warmer climate conditions (PSUP)  | kW     | 0            |
| Type of energy supply, auxiliary heater  |        | elektrisch   |
| Output control   |        | veränderlich |
| Sound power level, outdoor   | dB(A)  | 57           |
| Sound power level, indoor  |        | -            |
| Annual energy consumption under colder climate conditions for medium-temperature applications (QHE)                    | kWh/a  | 10193        |
| Annual energy consumption under average climate conditions for medium-temperature applications (QHE)                   | kWh/a  | 4865         |
| Annual energy consumption under warmer climate conditions for medium-temperature applications (QHE)                    | kWh/a  | 2048         |
| Flow rate on heat source side  | m3/h   | 2200         |
| Load profile   |        | -            |
| Daily power consumption under colder climate conditions (QELEC)  |        | -            |
| Daily power consumption under average climate conditions (QELEC)   |        | -            |
| Daily power consumption under warmer climate conditions (QELEC)  |        | -            |
| Annual power consumption under colder climate conditions (AEC)   |        | -            |
| Annual power consumption under average climate conditions (AEC)  |        | -            |
| Annual power consumption under warmer climate conditions (AEC)   |        | -            |
| Seasonal space heating energy efficiency under warmer climate conditions for low-temperature applications ( $\eta_s$ ) | %      | 213          |
| Energy efficiency, DHW heating ( $\eta_{wh}$ ), under average climate conditions                                       |        | -            |
| Energy efficiency, DHW heating ( $\eta_{wh}$ ), warmer climates  |        | -            |