



**ENERG**  
енергия · ενέργεια



**STIEBEL ELTRON**

HSBC 225 S 1



**65 W**

**225 L**

2017

812/2013

Product datasheet: Hot water storage tanks to regulation (EU) no. 812/2013 / (S.I. 2019 No. 539 / Schedule 2)

		<b>HSBC 225 S 1</b>
		206045
Manufacturer		STIEBEL ELTRON
Energy efficiency class		A
standing loss S	W	65
storage volume V	I	225



**ENERG**  
енергия · ενέργεια



**STIEBEL ELTRON** HSBC 300 cool (GB) Set



**61 W**

**291 L**

Product datasheet: Hot water storage tanks to regulation (EU) no. 812/2013 / (S.I. 2019 No. 539 / Schedule 2)

		<b>HSBC 300 cool (GB) Set</b>
		204651
Manufacturer		STIEBEL ELTRON
Model identification of the supplier		HSBC 300 cool (GB) Set
Energy efficiency class		B
standing loss S	W	61
storage volume V	l	291




**ENERG** Y IJA  
 енергия · ενεργεια IE IA

**STIEBEL ELTRON** WPL-A 07 HK 230  
 Premium



55 °C

35 °C

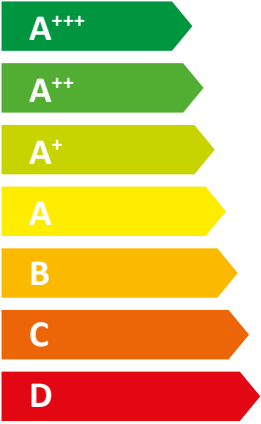

Icon of a house with sound waves emanating from it, representing sound power level.

Icon of a house with sound waves entering it, representing sound pressure level.

**48 dB**

Two bar charts showing energy consumption in kW. The left chart is for 55 °C and the right chart is for 35 °C. Each chart has three bars: a dark blue bar for 12 kW, a medium blue bar for 8 kW, and a light blue bar for 4 kW. Below the charts is a map of Europe with the same color-coded bars overlaid on different regions.

■ 12  
 ■ 8  
 ■ 4  
 kW

■ 12  
 ■ 8  
 ■ 4  
 kW

2019

811/2013

**Product datasheet: Room heater to regulation (EU) no. 811/2013 / (S.I. 2019 No. 539 / Schedule 2)**

		<b>WPL-A 07 HK 230 Premium</b>
		200123
Manufacturer		STIEBEL ELTRON
Energy efficiency class for central heating in moderate climates for medium temperature applications		A+++
Energy efficiency class for central heating in moderate climates for low temperature applications		A+++
Rated heating output in moderate climates for average temperature applications (Prated)	kW	8
Rated heating output in moderate climates for low temperature applications (Prated)	kW	8
Seasonal room heating efficiency in moderate climates for average temperature applications ( $\eta_s$ )	%	153
Seasonal room heating efficiency in moderate climates for low temperature applications ( $\eta_s$ )	%	193
Annual energy consumption in moderate climates for average temperature applications (QHE)	kWh/a	4219
Annual energy consumption in moderate climates for low temperature applications (QHE)	kWh/a	3413
Sound power level external	dB(A)	48
Special measures		For all special measures to be taken during assembly, installation or maintenance of the room heater, see the installation instructions
Rated heating output in colder climates for average temperature applications (Prated)	kW	12
Rated heating output in colder climates for low temperature applications (Prated)	kW	12
Rated heating output in warmer climates for average temperature applications (Prated)	kW	4
Rated heating output in warmer climates for low temperature applications (Prated)	kW	4
Seasonal room heating efficiency in colder climates for average temperature applications ( $\eta_s$ )	%	128
Seasonal room heating efficiency in colder climates for low temperature applications ( $\eta_s$ )	%	151
Seasonal room heating efficiency in warmer climates for average temperature applications ( $\eta_s$ )	%	163
Seasonal room heating efficiency in warmer climates for low temperature applications ( $\eta_s$ )	%	231
Annual energy consumption in colder climates for average temperature applications (QHE)	kWh/a	9005
Annual energy consumption in colder climates for low temperature applications (QHE)	kWh/a	7574
Annual energy consumption in warmer climates for average temperature applications (QHE)	kWh/a	1388
Annual energy consumption in warmer climates for low temperature applications (QHE)	kWh/a	984



# ENERG

енергия · ενεργεια

Y


IJA

IE

IA

**STIEBEL ELTRON**

WPL-A 07 HK 230 Premium



A+++

A+++

A+++

A++

A+

A

B

C

D

E

F

G

+

+

+

+

**Product datasheet: Composite system consisting of room heater and temperature controller to regulation (EU) no. 811/2013 / (S.I. 2019 No. 539 / Schedule 2)**

		<b>WPL-A 07 HK 230 Premium</b>
		200123
Manufacturer		STIEBEL ELTRON
Seasonal room heating efficiency in moderate climates for average temperature applications ( $\eta_s$ )	%	153
Temperature controller class		VI
Contribution of temperature controller to room heating energy efficiency	%	4
Room heating energy efficiency of composite system under moderate climatic conditions	%	157
Room heating energy efficiency of composite system under colder climatic conditions	%	132
Room heating energy efficiency of composite system under warmer climatic conditions	%	167
Value of differential between room heating energy efficiency under moderate climatic conditions and that under colder climatic conditions	%	25
Value of differential between room heating energy efficiency under warmer climatic conditions and that under moderate climatic conditions	%	10
Energy efficiency class for central heating in moderate climates for medium temperature applications		A+++
Room heating energy efficiency class of composite system under moderate climatic conditions		A+++



Required details about room heater and combi heater with heat pump to regulation (EU) no. 813/2013 & 811/2013

		WPL-A 07 HK 230 Premium
		200123
Manufacturer		STIEBEL ELTRON
Heat source		Outside air
Low temperature heat pump		-
With booster heater		x
Combi boiler with heat pump		-
Rated heating output in colder climates for average temperature applications (Prated)	kW	12
Rated heating output in moderate climates for average temperature applications (Prated)	kW	8
Rated heating output in warmer climates for average temperature applications (Prated)	kW	4
Tj = -7 °C heating output, partial load range in colder climates (Pdh)	kW	7.2
Tj = -7 °C heating output, partial load range under moderate climatic conditions (Pdh)	kW	7.0
Tj = 2 °C heating output, partial load range in colder climates (Pdh)	kW	4.4
Tj = 2 °C heating output, partial load range under moderate climatic conditions (Pdh)	kW	4.3
Tj = 2 °C heating output, partial load range in warmer climates (Pdh)	kW	4.3
Tj = 7 °C heating output, partial load range in colder climates (Pdh)	kW	3.1
Tj = 7 °C heating output, partial load range under moderate climatic conditions (Pdh)	kW	3.0
Tj = 7 °C heating output, partial load range in warmer climates (Pdh)	kW	2.8
Tj = 12 °C heating output, partial load range in colder climates (Pdh)	kW	3.7
Tj = 12 °C heating output, partial load range under moderate climatic conditions (Pdh)	kW	3.6
Tj = 12 °C heating output, partial load range in warmer climates (Pdh)	kW	3.5
Tj = dual mode temperature in colder climates (Pdh)	kW	7.2
Tj = dual mode temperature under moderate climatic conditions (Pdh)	kW	7.0
Tj = dual mode temperature in warmer climates (Pdh)	kW	4.3
Tj = operating temperature limit in colder climates (Pdh)	kW	5.0
Tj = operating temperature limit under moderate climatic conditions (Pdh)	kW	6.5
Tj = operating temperature limit in warmer climates (Pdh)	kW	4.3
For air/water heat pumps: Tj = -15 °C (if TOL < -20 °C) (Pdh)	kW	6.3
Dual mode temperature in colder climates (Tbiv)	°C	-7
Dual mode temperature in moderate climates (Tbiv)	°C	-7
Dual mode temperature in warmer climates (Tbiv)	°C	2
Seasonal room heating efficiency in colder climates for average temperature applications (ηs)	%	128
Seasonal room heating efficiency in moderate climates for average temperature applications (ηs)	%	153
Seasonal room heating efficiency in warmer climates for average temperature applications (ηs)	%	163
Tj = -7 °C COP, partial load range in colder climates (COPd)		2.70
Tj = -7 °C COP, partial load range under moderate climatic conditions (COPd)		2.43
Tj = 2 °C COP, partial load range in colder climates (COPd)		4.31
Tj = 2 °C COP, partial load range under moderate climatic conditions (COPd)		3.79
Tj = 2 °C COP, partial load range in warmer climates (COPd)		2.93
Tj = 7 °C COP, partial load range in colder climates (COPd)		5.99
Tj = 7 °C COP, partial load range under moderate climatic conditions (COPd)		5.22
Tj = 7 °C COP, partial load range in warmer climates (COPd)		3.90
Tj = 12 °C COP, partial load range in colder climates (COPd)		6.88
Tj = 12 °C COP, partial load range under moderate climatic conditions (COPd)		6.33
Tj = 12 °C COP, partial load range in warmer climates (COPd)		5.53
Tj = dual mode temperature in colder climates (COPd)		2.70
Tj = dual mode temperature under moderate climatic conditions (COPd)		2.43

Tj = dual mode temperature in warmer climates (COPd)		2.93
Tj = operating temperature limit in colder climates (COPd)		1.78
Tj = operating temperature limit under moderate climatic conditions (COPd)		2.14
Tj = operating temperature limit in warmer climates (COPd)		2.93
For air/water heat pumps: Tj = -15 °C (if TOL < -20 °C) (COPd)		2.22
Operating temperature limit in colder climates (TOL)	°C	-22
Operating temperature limit in moderate climates (TOL)	°C	-10
Operating temperature limit in warmer climates (TOL)	°C	2
Heating water operating temperature limit in colder climates (WTOL)	°C	75
Heating water operating temperature limit (WTOL)	°C	75
Heating water operating temperature limit in warmer climates (WTOL)	°C	75
Power consumption, OFF state (Poff)	W	12
Power consumption, thermostat OFF state (PTO)	W	10
Standby power consumption (PSB)	W	12
Power consumption, operating state, with crankcase heating (PCK)	W	10
Booster heater heating output in colder climates (Psup)	kW	6.9
Booster heater heating output in moderate climate (Psup)	kW	1.4
Booster heater heating output in warmer climates (Psup)	kW	0.0
Type of energy supply, booster heater		electric
Power control		variable
Sound power level external	dB(A)	48
Annual energy consumption in colder climates for average temperature applications (QHE)	kWh/a	9005
Annual energy consumption in moderate climates for average temperature applications (QHE)	kWh/a	4219
Annual energy consumption in warmer climates for average temperature applications (QHE)	kWh/a	1388
Flow rate, heat source side	m <sup>3</sup> /h	2250
Special measures	For all special measures to be taken during assembly, installation or maintenance of the room heater, see the installation instructions	