





ENERGY

STIEBEL ELTRON WPF 35



55 °C

35 °C

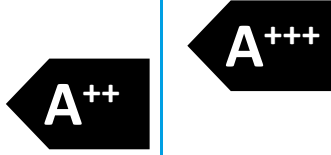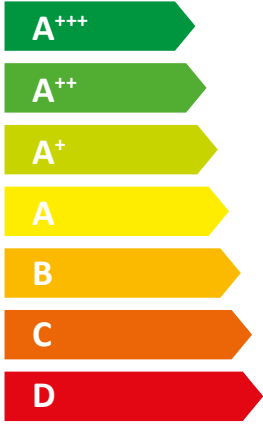

60 dB

60 dB

| | |
|------|------|
| ■ 43 | ■ 47 |
| ■ 34 | ■ 38 |
| ■ 34 | ■ 38 |
| kW | kW |

2019

811/2013

Product datasheet: Room heater to regulation (EU) no. 811/2013 / (S.I. 2019 No. 539 / Schedule 2)


| | | WPF 35 |
|---|-------|---|
| | | 233005 |
| Manufacturer | | STIEBEL ELTRON |
| Energy efficiency class for central heating in moderate climates for medium temperature applications | | A++ |
| Energy efficiency class for central heating in moderate climates for low temperature applications | | A+++ |
| Rated heating output in moderate climates for average temperature applications (Prated) | kW | 34 |
| Rated heating output in moderate climates for low temperature applications (Prated) | kW | 38 |
| Seasonal room heating efficiency in moderate climates for average temperature applications (η_s) | % | 133 |
| Seasonal room heating efficiency in moderate climates for low temperature applications (η_s) | % | 200 |
| Annual energy consumption in moderate climates for average temperature applications (QHE) | kWh/a | 20029 |
| Annual energy consumption in moderate climates for low temperature applications (QHE) | kWh/a | 15136 |
| Sound power level internal | dB(A) | 60 |
| Sound power level external | dB(A) | 60 |
| Special measures | | For all special measures to be taken during assembly, installation or maintenance of the room heater, see the installation instructions |
| Rated heating output in colder climates for average temperature applications (Prated) | kW | 43 |
| Rated heating output in colder climates for low temperature applications (Prated) | kW | 47 |
| Rated heating output in warmer climates for average temperature applications (Prated) | kW | 34 |
| Rated heating output in warmer climates for low temperature applications (Prated) | kW | 38 |
| Seasonal room heating efficiency in colder climates for average temperature applications (η_s) | % | 139 |
| Seasonal room heating efficiency in colder climates for low temperature applications (η_s) | % | 208 |
| Seasonal room heating efficiency in warmer climates for average temperature applications (η_s) | % | 132 |
| Seasonal room heating efficiency in warmer climates for low temperature applications (η_s) | % | 199 |
| Annual energy consumption in colder climates for average temperature applications (QHE) | kWh/a | 28986 |
| Annual energy consumption in colder climates for low temperature applications (QHE) | kWh/a | 21594 |
| Annual energy consumption in warmer climates for average temperature applications (QHE) | kWh/a | 13033 |
| Annual energy consumption in warmer climates for low temperature applications (QHE) | kWh/a | 9834 |



ENERGY

STIEBEL ELTRON

WPF 35



A⁺⁺

A⁺⁺⁺

A⁺⁺

A⁺⁺

A⁺

A

B

C


D

E

F

G

+



+



+



+



Product datasheet: Composite system consisting of room heater and temperature controller to regulation (EU) no. 811/2013 / (S.I. 2019 No. 539 / Schedule 2)

| | | WPF 35 |
|---|---|----------------|
| | | 233005 |
| Manufacturer | | STIEBEL ELTRON |
| Seasonal room heating efficiency in moderate climates for average temperature applications (η_s) | % | 133 |
| Temperature controller class | | VII |
| Contribution of temperature controller to room heating energy efficiency | % | 3 |
| Room heating energy efficiency of composite system under moderate climatic conditions | % | 137 |
| Room heating energy efficiency of composite system under colder climatic conditions | % | 143 |
| Room heating energy efficiency of composite system under warmer climatic conditions | % | 136 |
| Value of differential between room heating energy efficiency under moderate climatic conditions and that under colder climatic conditions | % | 6 |
| Value of differential between room heating energy efficiency under warmer climatic conditions and that under moderate climatic conditions | % | 1 |
| Energy efficiency class for central heating in moderate climates for medium temperature applications | | A++ |
| Room heating energy efficiency class of composite system under moderate climatic conditions | | A++ |

Required details about room heater and combi heater with heat pump to regulation (EU) no. 813/2013 & 811/2013

| | | WPF 35 |
|---|----|----------------|
| | | 233005 |
| Manufacturer | | STIEBEL ELTRON |
| Heat source | | Brine |
| With booster heater | | - |
| Combi boiler with heat pump | | - |
| Rated heating output in colder climates for average temperature applications (Prated) | kW | 43 |
| Rated heating output in moderate climates for average temperature applications (Prated) | kW | 34 |
| Rated heating output in warmer climates for average temperature applications (Prated) | kW | 34 |
| Tj = -7 °C heating output, partial load range in colder climates (Pdh) | kW | 35.8 |
| Tj = -7 °C heating output, partial load range under moderate climatic conditions (Pdh) | kW | 34.5 |
| Tj = -7 °C heating output, partial load range in warmer climates (Pdh) | kW | 34.1 |
| Tj = 2 °C heating output, partial load range in colder climates (Pdh) | kW | 36.7 |
| Tj = 2 °C heating output, partial load range under moderate climatic conditions (Pdh) | kW | 35.8 |
| Tj = 2 °C heating output, partial load range in warmer climates (Pdh) | kW | 34.1 |
| Tj = 7 °C heating output, partial load range in colder climates (Pdh) | kW | 37.4 |
| Tj = 7 °C heating output, partial load range under moderate climatic conditions (Pdh) | kW | 36.7 |
| Tj = 7 °C heating output, partial load range in warmer climates (Pdh) | kW | 35.2 |
| Tj = 12 °C heating output, partial load range in colder climates (Pdh) | kW | 37.9 |
| Tj = 12 °C heating output, partial load range under moderate climatic conditions (Pdh) | kW | 37.5 |
| Tj = 12 °C heating output, partial load range in warmer climates (Pdh) | kW | 37.0 |
| Tj = dual mode temperature in colder climates (Pdh) | kW | 35.3 |
| Tj = dual mode temperature under moderate climatic conditions (Pdh) | kW | 34.1 |
| Tj = dual mode temperature in warmer climates (Pdh) | kW | 34.1 |
| Tj = operating temperature limit in colder climates (Pdh) | kW | 34.1 |
| Tj = operating temperature limit under moderate climatic conditions (Pdh) | kW | 34.1 |
| Tj = operating temperature limit in warmer climates (Pdh) | kW | 34.1 |
| For air/water heat pumps: Tj = -15 °C (if TOL < -20 °C) (Pdh) | kW | 34.1 |
| Dual mode temperature in colder climates (Tbiv) | °C | -15 |
| Dual mode temperature in moderate climates (Tbiv) | °C | -10 |
| Dual mode temperature in warmer climates (Tbiv) | °C | 2 |
| Seasonal room heating efficiency in colder climates for average temperature applications (ηs) | % | 139 |
| Seasonal room heating efficiency in moderate climates for average temperature applications (ηs) | % | 133 |
| Seasonal room heating efficiency in warmer climates for average temperature applications (ηs) | % | 132 |
| Tj = -7 °C COP, partial load range in colder climates (COPd) | | 3.48 |
| Tj = -7 °C COP, partial load range under moderate climatic conditions (COPd) | | 2.95 |
| Tj = -7 °C COP, partial load range in warmer climates (COPd) | | 2.82 |
| Tj = 2 °C COP, partial load range in colder climates (COPd) | | 3.91 |
| Tj = 2 °C COP, partial load range under moderate climatic conditions (COPd) | | 3.50 |
| Tj = 2 °C COP, partial load range in warmer climates (COPd) | | 2.82 |
| Tj = 7 °C COP, partial load range in colder climates (COPd) | | 4.32 |
| Tj = 7 °C COP, partial load range under moderate climatic conditions (COPd) | | 3.91 |
| Tj = 7 °C COP, partial load range in warmer climates (COPd) | | 3.24 |
| Tj = 12 °C COP, partial load range in colder climates (COPd) | | 4.66 |
| Tj = 12 °C COP, partial load range under moderate climatic conditions (COPd) | | 4.42 |
| Tj = 12 °C COP, partial load range in warmer climates (COPd) | | 4.08 |
| Tj = dual mode temperature in colder climates (COPd) | | 3.25 |

| | | |
|---|---|----------|
| Tj = dual mode temperature under moderate climatic conditions (COPd) | | 2.82 |
| Tj = dual mode temperature in warmer climates (COPd) | | 2.82 |
| Tj = operating temperature limit in colder climates (COPd) | | 2.82 |
| Tj = operating temperature limit under moderate climatic conditions (COPd) | | 2.82 |
| Tj = operating temperature limit in warmer climates (COPd) | | 2.82 |
| For air/water heat pumps: Tj= -15 °C (if TOL < -20 °C) (COPd) | | 2.82 |
| Heating water operating temperature limit (WTOL) | °C | 60 |
| Power consumption, OFF state (Poff) | W | 0.000 |
| Power consumption, thermostat OFF state (PTO) | W | 7 |
| Standby power consumption (PSB) | W | 7 |
| Power consumption, operating state, with crankcase heating (PCK) | W | 74 |
| Booster heater heating output (PSUB) | kW | 0.0 |
| Type of energy supply, booster heater | | electric |
| Power control | | Fixed |
| Sound power level external | dB(A) | 60 |
| Sound power level internal | dB(A) | 60 |
| Annual energy consumption in colder climates for average temperature applications (QHE) | kWh/a | 28986 |
| Annual energy consumption in moderate climates for average temperature applications (QHE) | kWh/a | 20029 |
| Annual energy consumption in warmer climates for average temperature applications (QHE) | kWh/a | 13033 |
| Flow rate, heat source side | m ³ /h | 8,8 |
| Special measures | For all special measures to be taken during assembly, installation or maintenance of the room heater, see the installation instructions | |